Remington Arms Company, Inc.
870 Remington Drive
PO Box 700
Madison, NC 27025-0700
(336) 548-8700
800-243-9700

REMINGTON

Arms Company, Inc.

MODEL 10
PUMP ACTION SHOTGUN

- Shooting Safety Commandments
- Information
- Instructions for Operation & Care of Rifle
- Components Parts Listing
- Value and Reference Book Listing

NOTE: We are pleased to accommodate your request for the Model 10 Pump Action Shotgun information. The following documentation represents all information available on this model from the Remington Arms Co., Inc.
DO NOT MAKE CHANGES OR ALTERATIONS TO ANY PARTS OF A FIREARM. USE ONLY REMINGTON PARTS. NEVER MAKE AN ADJUSTMENT TO THE TRIGGER, OR CHANGE THE SHAPE OR SIZE OF THE SEAR, SEAR NOTCH, OR OTHER PARTS.

Ten Commandments of Shooting Safety

1. Always keep the muzzle pointed in a safe direction.

2. Firearms should be unloaded when not in use.

3. Don't rely on your gun's "safety".

4. Be sure of your target and what is beyond it.

5. Use correct ammunition.

6. If your gun fails to fire when the trigger is pulled, handle with care!

7. Always wear eye and ear protection when shooting.

8. Be sure the barrel is clear of obstructions before shooting.

9. Do not alter or modify your gun, and have guns serviced regularly.

10. Learn the mechanical and handling characteristics of the firearm you are using.

MODEL 10

Remington Repeating Shotgun

"Pump Action"

Solid Breech Hammerless Take-Down

Made in 12 Gauge Only

THE Remington 1908 Model, *solid breech*, hammerless, take-down, six-shot repeating Shotgun is an example of the highest development of the gun-makers' art. It embodies many new and novel features and eliminates those which are objectionable in repeating shotguns of the present day. Beauty of design, perfection of workmanship and finish are strikingly apparent. Absence of projecting parts adds symmetry to its altogether pleasing and graceful lines. It handles fast and balances perfectly, due in large measure to the grip of stock being more nearly in line with the barrel than any other design of repeating shotgun yet produced. Operation of the mechanism causes no change in the exterior appearance of the gun, excepting in the position of the slide-handle or fore-arm, which is not unsightly.

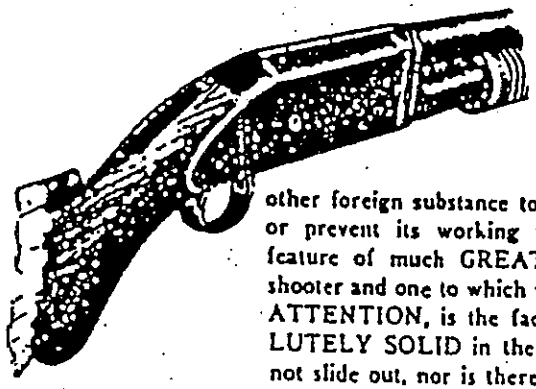

SOLID BREECH The design of receiver or frame provides for a SOLID BREECH. There are no openings in top or sides of receiver to weaken it, or allow dirt, snow, rain or other foreign substance to reach the mechanism, to rust or prevent its working under all conditions. But a feature of much GREATER IMPORTANCE to the shooter and one to which we desire to draw ESPECIAL ATTENTION, is the fact that the receiver is ABSOLUTELY SOLID in the rear. The breech block does not slide out, nor is there an opening of any description at this point, affording absolute protection no matter what may occur against the breech block, firing-pin, powder gases, defective primers, grease, etc., from blowing back into the eyes or face of the shooter with attendant liability of serious injuries.

The loading and ejecting of shells is done through an opening in the under side of receiver, with the advantage that ejected shells are kept away from the face of the shooter and from interfering with the aim.

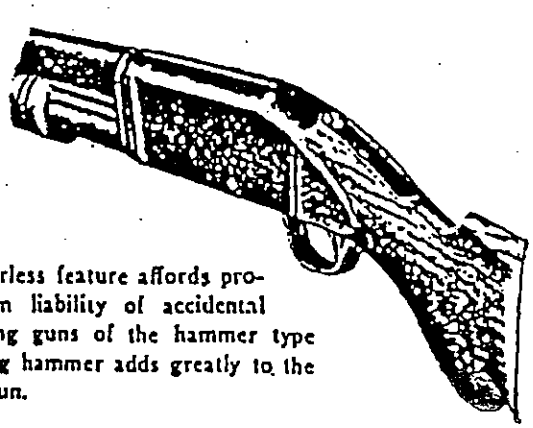

HAMMERLESS The hammerless feature affords protection from liability of accidental discharge common to repeating guns of the hammer type and the absence of a projecting hammer adds greatly to the attractive appearance of the gun.

Remington Repeating Shotgun

"Pump Action"

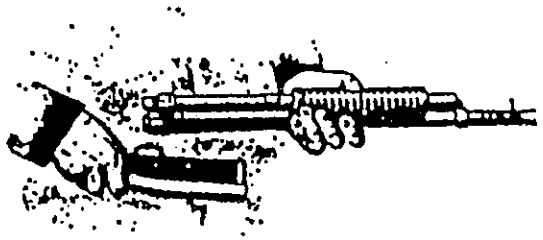

Cut No. 4

TO PLACE GUN IN GUN CASE Draw magazine rearward until stopped and hold slide handle forward of stop lugs on magazine and turn magazine a quarter turn by means of lever. Turn magazine lever into place. Action bar is thus protected, as shown in Cut No. 4.

Directions for Operating

TO LOAD MAGAZINE Close action by pushing slide handle forward. Turn gun upside down. Place shells on breech block and push well into magazine, which holds five shells.

TO LOAD BARREL FROM MAGAZINE Press the button on right side of receiver and move slide handle smartly rearward and forward.

TO MAKE "SAFE" WHEN LOCKED Push safety slide (No. 53) rearward and the trigger will be locked.

TO OPEN GUN WHEN COCKED Press action bar lock button (No. 3) on right side of receiver and move slide handle rearward. After firing a shell be sure the full rearward movement of the slide is completed; otherwise the empty shell will be ejected without feeding the next loaded shell from the magazine. Be sure to bring back the slide as far as it will go.
from the magazine. Be sure to bring back the slide as far as it will go.

TO REMOVE LOADED SHELLS FROM CHAMBER Press button on right side of receiver and open action by pulling slide handle back rather slowly and catch the loaded shell (which will be withdrawn from the barrel by this operation) at the opening in the bottom of the receiver.

TO REMOVE LOADED SHELLS FROM MAGAZINE Complete the rearward movement of slide handle which will release the next shell from the magazine; then push carrier up against side of receiver and with the fingers remove the shell which lies above the carrier. This operation will move slide handle slightly forward; by moving it rearward the next shell is released from the magazine and may be removed in the same manner. Repeat until the magazine is empty. Keep gun right side up when removing loaded shells.

Remington Repeating Shotgun

"Pump Action"

Directions for Setting Up and Taking Down

TO PUT GUN TOGETHER Push over magazine lever detent (No. 44) on front end of magazine (No. 47), which will release magazine lever (No. 40). Pull magazine lever out until stopped (Cut No. 1). By means of this lever unscrew magazine (No. 47) a quarter turn. Push slide handle (No. 34) forward until end of magazine is even with barrel yoke (No. 12).

PULL TRIGGER BEFORE ATTEMPTING TO PUT GUN TOGETHER as difficulty will be experienced in putting gun together if cocked. Snapping the trigger before assembling the gun will not be detrimental to the arm. Breech Block (14) must be forward and held firmly against Top of Receiver (No. 53). If breech block is not in forward position, jar into place by holding receiver downward, striking front end on palm. Grasp the barrel near breech with left hand (Cut No. 2), holding slide handle and magazine forward as far as possible. Hold the receiver in an inverted position with the right hand, pressing thumb through the opening in under side to hold Breech Block forward and against Top of Receiver. Enter barrel with magazine outward, as shown in Cut No. 2, until the barrel yoke is firmly against the face of the receiver. Screw a quarter turn until the qualifying lines on under side of barrel yoke and receiver meet (Cut No. 3). Still holding Breech Block against top of Receiver with thumb, pull slide handle back until action bar (No. 1) engages breach block and starts it rearward. By means of magazine lever, push magazine into receiver and screw a quarter turn. Turn magazine lever into place.

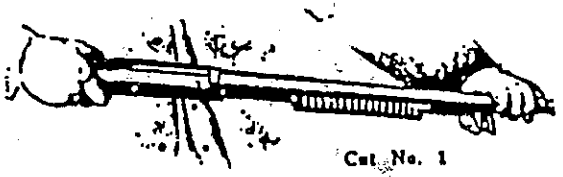

Cut No. 1

Cut No. 2

TO TAKE GUN DOWN Push over magazine lever detent on front end of magazine, which will release magazine lever out until stopped (Cut No. 1). By means of this lever, unscrew magazine a quarter turn. Push slide handle forward until magazine and action bar are free from receiver (Cut No. 3). Grasp the barrel and magazine near receiver (Cut No. 3), unscrew barrel a quarter turn (Cut No. 2), and pull out of receiver.

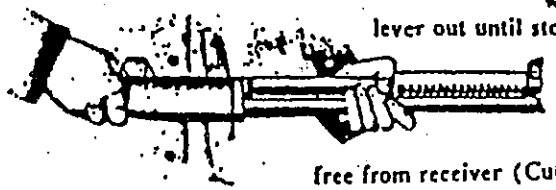

Cut No. 3

Remington Repeating Shotgun

(Pump Action)

Solid Breech — Hammerless — Take-Down

Made in 12 Guage Only

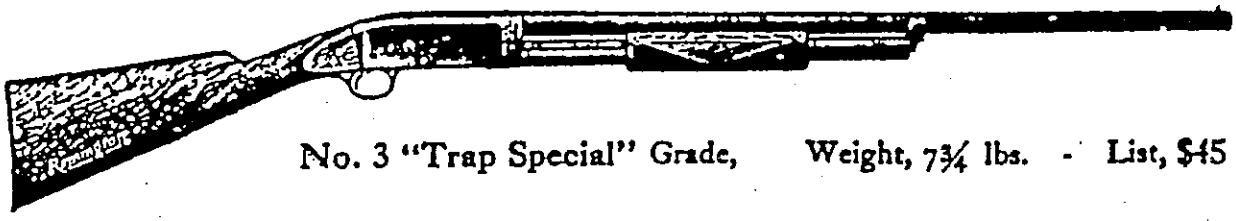

No. 3 "Trap Special" Grade, Weight, 7¾ lbs. - List, $45

Furnished with solid ribbed barrel instead of plain at an advance of $6.75 list.

A six shot repeater designed especially for trap shooting purposes. This grade differs from No. 3 "Trap in that the stock and fore-arm are American Walnut, the stock being furnished in but one dimension which is 14 inches in length, drop 2 inches at heel and 1½ inches at comb. The majority of trap shooters have found these dimensions to be the best adapted for trap shooting purposes. The barrel is of Remington steel and the top surface is neatly matted its entire length which prevents the reflection of light that might interfere with the shooter's sighting. It also aids in taking quick and accurate aim. The barrels of the "Trap Special" are especially selected for trap loads and all guaranteed to shoot over 70% of the load in a 30-inch circle at 40 yards.

Remington Repeating Shotgun

(Pump Action)

Solid Breech — Hammerless — Take-Down

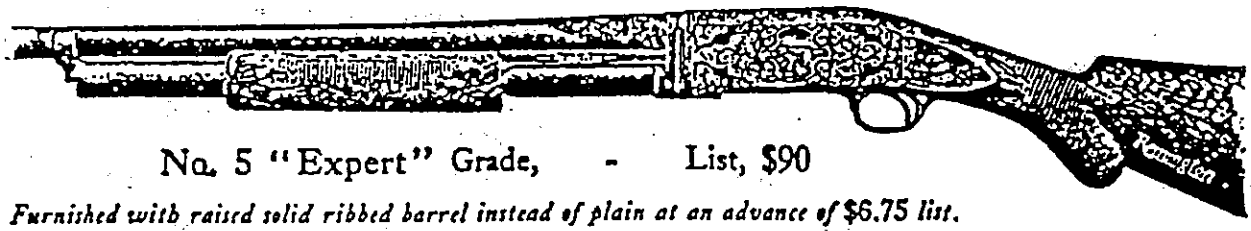

No. 5 "Expert" Grade, - List, $90

Furnished with raised solid ribbed barrel instead of plain at an advance of $6.75 list.

Six shot repeater, 26, 28, 30 and 32 inch Remington steel barrel, any desired choke. Stock and fore-arm are of the choicest Imported walnut, handsomely checkered by hand, silver name plate inlaid in stock. The barrel and receiver are finished with a beautiful deep scroll hand engraving with panel on left side of receiver. All working parts are hand polished. Stock dimensions are same as No. 4 Tournament grade. Made in 12 gauge only.

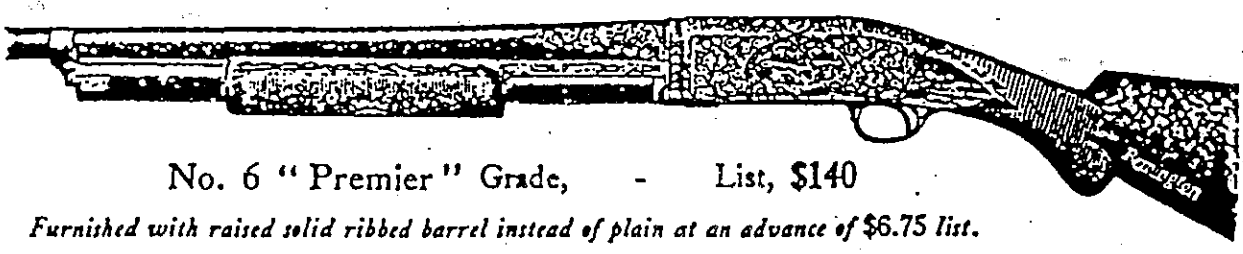

No. 6 "Premier" Grade, - List, $140

Furnished with raised solid ribbed barrel instead of plain at an advance of $6.75 list.

The No. 6 "Premier" grade Pump gun, like our No. 6 Autoloading shotgun, is a work of art, no effort being spared to produce the finest gun in both workmanship and finish as it is possible for a factory to turn out. The receiver and barrel are finished in a beautiful deep scroll hand engraving which brings out the game panels in relief. Owner's initials engraved on name plate, if so desired. Stock dimensions same as No. 4 Tournament grade. Made in 12 gauge only.

Remington Repeating Shotgun

(Pump Action)

Solid Breech — Hammerless — Take-Down

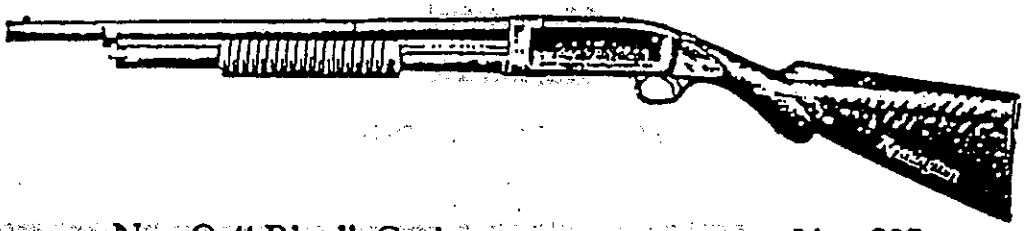

No. O "Riot" Grade, - - - - List, $27

This Gun furnished with 20-Inch Cylinder Barrel only

The Riot grade pump gun is bored especially to shoot buckshot. It is being used in a number of State prisons also by express messengers and watchmen. It is a six shot repeater made in 12 gauge only. Stock dimensions same as No. 1 Standard grade.

Matted Ribbed Barrel



Solid matted rib, advance of $6.75 list.

The matted ribbed barrel is particularly appreciated by shooters who have used a double gun and therefore are accustomed to a continuous line of sight, it also prevents the reflection of light on the top of the barrel from interfering with the shooters sight. Trap shooters especially find this feature helps to increase their scores. The barrel and rib are made in one solid piece, hence we cannot fit a rib to a plain barrel.

NOTE—See instructions on ordering extra barrels as given on page 8.

Remington Repeating Shotgun

(Pump Action)

Solid Breech — Hammerless — Take-Down

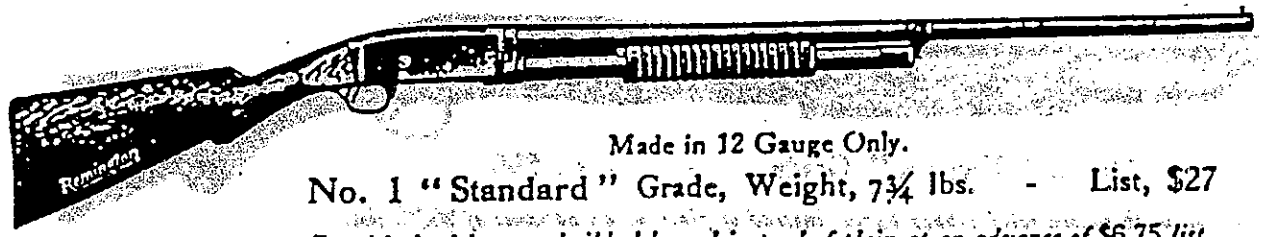

Made in 12 Gauge Only.

No. 1 "Standard" Grade, Weight, 7¾ lbs. - List, $27

Furnished with matted ribbed barrel instead of plain at an advance of $6.75 list.

Six shot repeater, 26, 28, 30 and 32 inch Remington steel barrel any desired choke. 30 inch full choke sent unless otherwise specified. Half-pistol grip stock and fore-arm of American walnut, regular dimensions 13¾ inches long, drop at heel 2¼ inches, drop at comb 1¾ inches. Any other length or drop of stock made to order at an advance of $10.

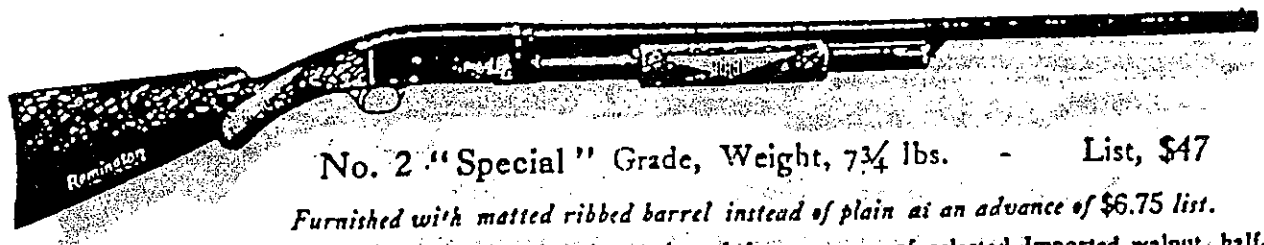

No. 2 "Special" Grade, Weight, 7¾ lbs. - List, $47

Furnished with matted ribbed barrel instead of plain at an advance of $6.75 list.

Same as No. 1 Standard grade with the exception that the stock and fore-arm are of selected Imported walnut, half-pistol grip and fore-arm are neatly checked. Will furnish made to order, without extra charge, lengths from 13½ inches to 15 inches, drops 2¼ inches to 3¼ inches at the heel. Any other length or drop of stock made to order at an advance of $10.

NOTE—For extras on Pump gun refer to page 59.

COMPONENT PARTS

Model 10 Repeating Shotgun

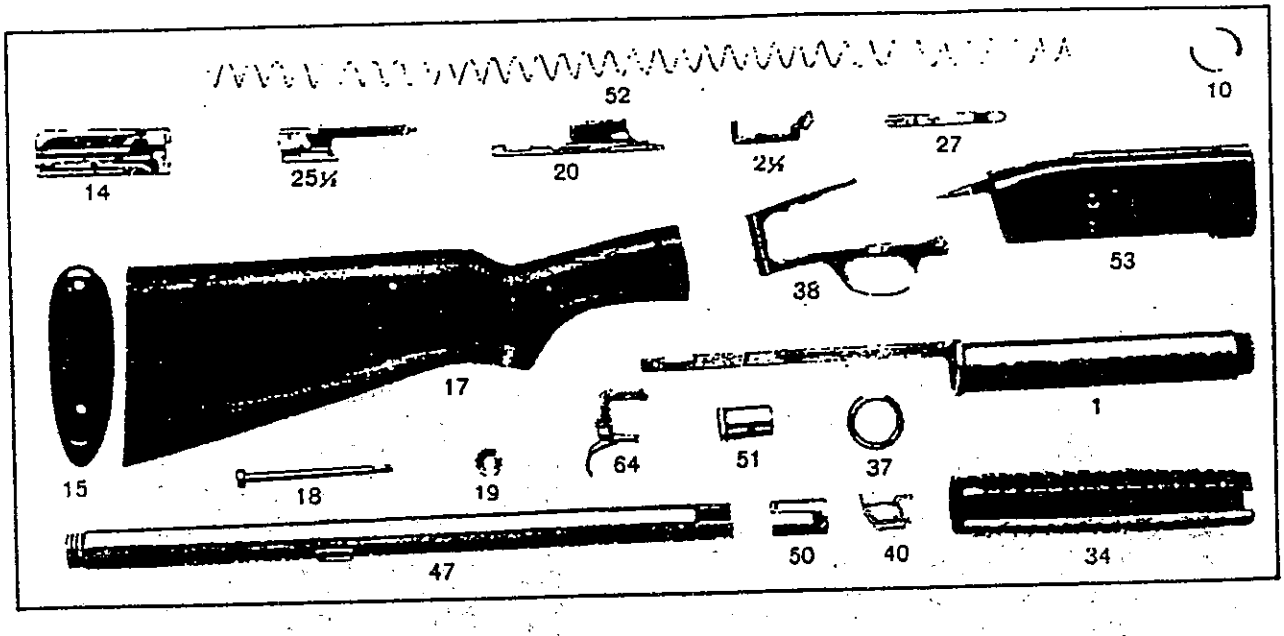

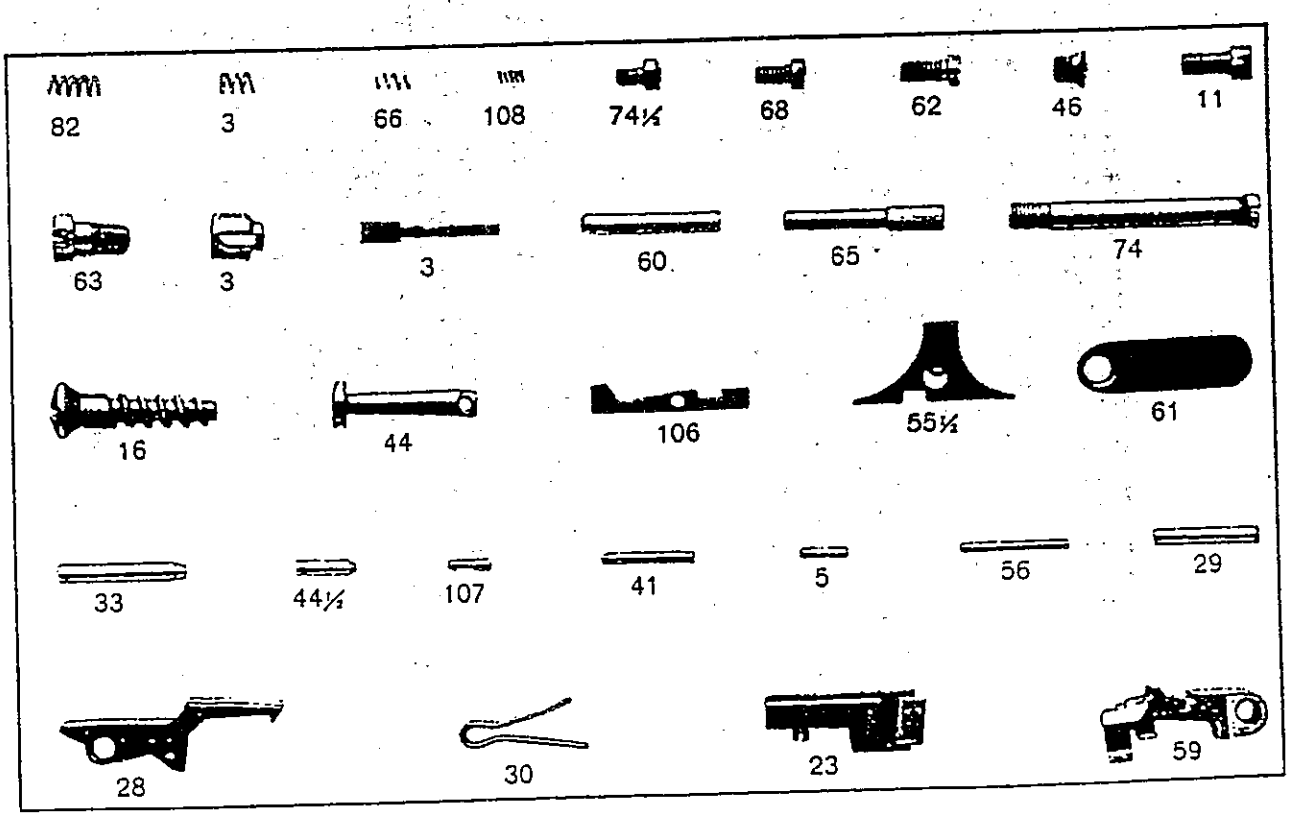

REMINGTON ARMS COMPANY, INC.

Remington Ilion Works — Ilion, N. Y., U. S. A.

"DISCONTINUED
NO PARTS AVAILABLE
FROM REMINGTON"

LIST OF COMPONENT PARTS

MODEL 10 REPEATING SHOTGUN

No.	Part
U-1	Action Bar, Grade A,B,C. $
U-1	Grade 10-D
U-1	Grade 10-E
U-1	Grade 10-F
U-2	Action Bar Lock
U-9	Action Bar Lock Button, complete
U-2½	Action Bar Lock, complete.
U-5	Action Bar Lock Pin
U-69	Action Bar Lock Shoe
U-6	Action Bar Lock Spring
U-7	Action Bar Stud
U-8	Action Bar Lock Rivet
U-103	Action Bar Lk Shoe Plunger
U-10	Barrel Adjusting Bushing
U-83	Barrel Adj't'g Bush'g Lock
U-11	Barrel Adj't'g Bush'g Lock Screw
U-43	Barrel Lug
U-45	Barrel Lug Screw
U-80	Barrel Lug Stop
U-12	Barrel Yoke, Grade A,B,C..
U-12	Grade D
U-12	Grade E
U-12	Grade F
U-13	Barrel Yoke Stop Screw..
U-14	Breech Block
U-14½	Breech Block, complete
U-15	Butt Plate
U-16	Butt Plate Screw
U-20	Carrier, complete
U-23	Carrier Stop
U-82	Carrier Friction Spring
U-25	Cocking Head
U-25½	Cocking Head, complete
U-26	Cocking Head Pin
U-27	Ejector Spring
U-28	Extractor
U-29	Extractor Pin
U-30	Extractor Spring
U-31	Firing Pin
U-32	Firing Pin Bushing
U-33	Firing Pin Bushing Pin
U-34	Fore-end, Grade 10-A
U-34	Fore-end, Grade 10-B,10-C.
U-34	Fore-end, Grade 10-S
U-34	Fore-end, Grade 10-D
U-34	Fore-end, Grade 10-E
U-34	Fore-end, Grade 10-F

No.	Part
U-37	Fore-end Nut $
U-75	Front Sight
U-38	Guard, Grade 10-A,B,C.
U-38	Guard, Grade 10-D
U-38	Guard, Grade 10-E
U-38	Guard, Grade 10-F
U-74	Guard Screw
U-74½	Guard Screw Check Screw
U-106	Latch (Breech Block)
U-107	Latch Pin
U-108	Latch Spring
U-39	Main Spring
U-40	Magazine Lever
U-41	Magazine Lever Pin
U-42	Magazine Lever Spring
U-44	Magazine Lever Detent
U-44½	Magazine Lever Detent Pin
U-46	Magazine Plug Screw
U-47	Magazine Tube
U-50	Magazine Plug
U-52	Magazine Spring
U-51	Magazine Follower
U-53	Receiver, Grade 10-A,B,C..
U-53	Receiver, Grade 10-D
U-53	Receiver, Grade 10-E
U-53	Receiver, Grade 10-F
U-54	Safety Slide Ball
U-55	Safety Slide
U-55½	Safety Slide, complete
U-56	Safety Slide Pin
U-57	Safety Slide Spring
U-58	Safety Slide Plug
U-59	Sear
U-60	Sear Pin
U-61	Sear Spring
U-62	Sear Spring Screw
U-17	Stock, Grade 10-A
U-17	Stock, Grade 10-B and C
U-17-S	Stock, Grade 10-S
U-17	Stock, Grade 10-D
U-17	Stock, Grade 10-E
U-17	Stock, Grade 10-F
U-18	Stock Bolt
U-19	Stock Bolt Washer
U-63	Tang Screw
U-68	Tang Screw Check Screw
U-64	Trigger
U-65	Trigger Pin
U-66	Trigger Spring

EXPLANATION OF OPERATION

Grasp the fore-end firmly and pull back, which moves action bar into re ceiver. The action bar draws the breech block below the recoil shoulder, i: the receiver; at the same time while the block is moving backward, the firin; pin, which is in the breech block, is cocked. Near the end of backward stroke the breech block turns the carrier to bottom of receiver, allowing the shell t: come from the magazine back upon the carrier. The arm is now in positio: as shown in "Sectional View," "Action Open."

Pushing the fore-end forward moves the carrier up with the shell until th shell is brought into the barrel and locked there by the breech block. The sea cannot be disengaged from the firing pin, because the trigger cannot reac the sear until the breech block has locked the shell securely in the barrel.

The gun may be made "safe" by pushing the safety toward the rear, whe the trigger cannot be pulled. The fore-end canno! be pulled back when th gun is cocked because the action is locked by the action bar lock engaging i slot in side of receiver. This may be released either by firing the arm or b pressing the release button on the right side of receiver, when the action ma be opened, if it is not desired to fire the shell.

Assume that the gun has been fired—the arm is then in position as show in "Sectional View," "Action Closed." Pull back fore-end. The extractor o the front end of the breech block grasps the rim of the shell and pulls it out The shell is held in the top of the receiver by two ribs until drawn fully out o barrel when the extractor, extractor spring and ejector spring, which are i top of the receiver, push the empty shell straight down and out of the buttor of the receiver.

CARE OF FIREARMS

A firearm should be cleaned as quickly as possible after shooting. Dela causes the fouling to become sticky and hard, making removal difficult REMINGTON Powder Solvent is highly recommended for this purpose.

Always clean the barrel from the breech. **All** REMINGTON **firearms are made in Take-Down style so they can be cleaned in this manner.** If cleaned from the muzzle the dirt is pushed back into the action and the cleaning rod is apt to bend or break the ejector spring causing failure to operate properly.

Another effective means of cleaning is by the use of boiling water, which should be poured through the barrel.

Care should be taken that the barrel is thoroughly dried, then greased with a heavy grease, preferably REMINGTON Gun Grease.

When the gun is again used the grease should be carefully removed. All mechanism and surfaces should be cleaned and lubricated with a thin oil.

Rem Oil, which has been developed after long and careful experimental work at our arms factory, is highly recommended for this purpose. It is in general use at our plants.

The sear spring located in bottom of breech block should be kept screwed in as far as possible. Do not remove barrel lug screw or attempt to remove barrel lug or barrel yoke, as these have been carefully adjusted by special factory tools.

If stock becomes slightly loose from shrinkage of wood it should be tightened immediately by removing butt plate and turning bolt tightly, using a long screwdriver in deep hole of stock.

Firearms Value & Reference Books

NOTE: We do not provide information on firearms' values. You may want to have your firearm appraised by a gunsmith. The following sources may also be helpful. We do not accept responsibility for the goods or services provided by these sources.

Firearms Value Books

Blue Book of Gun Values
Blue Book Publications
8009 34th Avenue South #175
Minneapolis, MN 55425
800-877-GUNS

Flayderman's Guide to Firearm Values

Gun List
Modern Gun Values
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Gun Trader's Guide
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Reference Books

The Remington 700
John Flacy
Brownells, Inc.
200 South Front Street
Montezuma, IA 50171
515-623-5401

Cartridges of the World
Frank C. Barnes

Standard Catalog of Firearms
Krause Publications
700 East State Street
Iola, WI 54990-0001
847-573-8530

Shooter's Bible
Stoeger Publishing Company
5 Mansard Court
Wayne, NJ 07470
973-872-9500

Remington, America's Oldest Gunmanker
Remington Arms Co.
PO Box 700
Madison, NC 27025
Attention: History Book
800-423-8495